


CALL POINT MANUAL



Technical parameters:

Working Voltage	24VDC
Standby Current	$\leq 100 \mu\text{A}$
Contact Resistance	$\leq 0.02\text{ohm}$
Working Conditions	Temp. $-10\sim+65\text{ }^{\circ}\text{C}$; Humidity: $10\%\sim90\%\text{RH}$
Product Size	87 x 87 x 58.4mm

Instruction and wire connection as below:

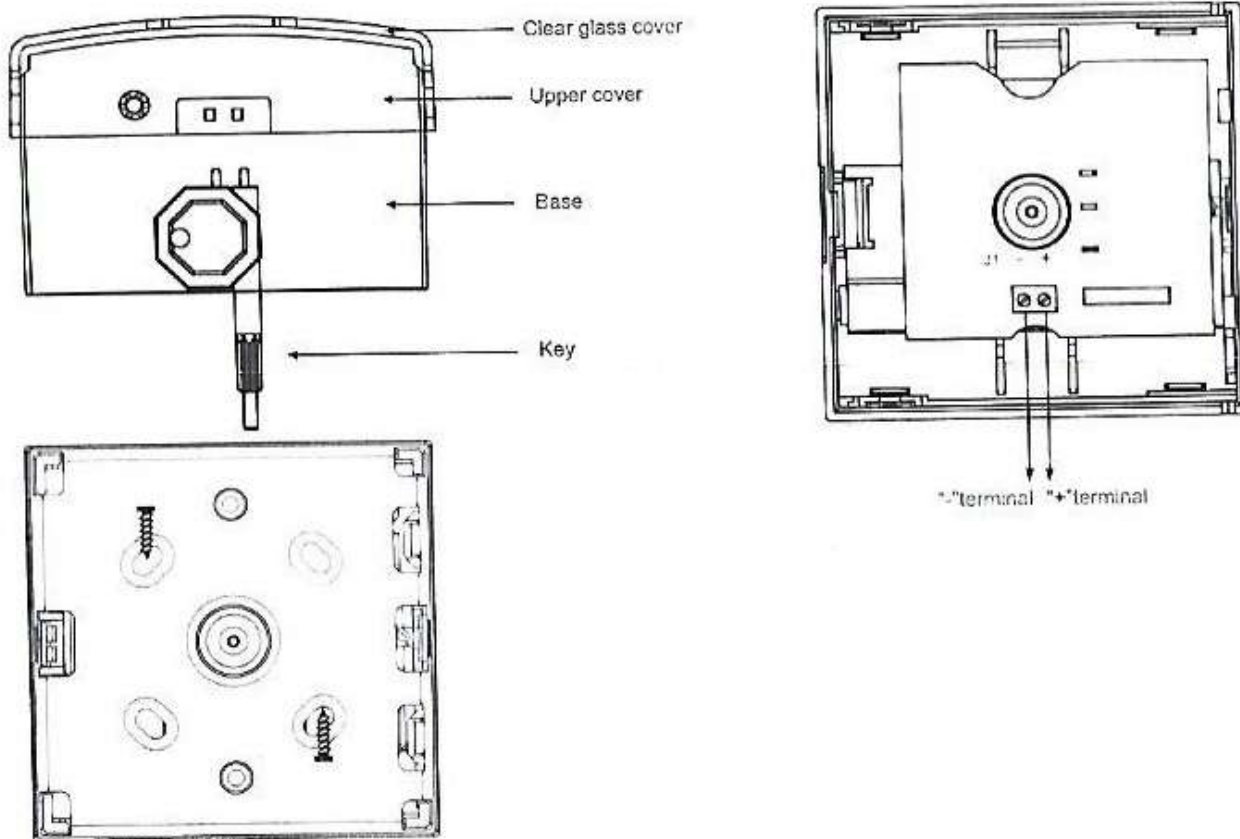

Installation details

1. Align the top of the key with the two holes at the bottom of the call point, then open the call point.
2. Remove the protect base.
3. Screw two screws diagonally on the base to fix it.
4. Finally install the upper cover to complete.

Remark:

For the device with LED indicator light, the green indicator light blinking indicates normal working status; Red LED Steady on indicates the alarm status. Connect cables according to the "-" and "+" marked on the PCB terminals.