



VALKYRIE AB

ADDRESSABLE BEACON

MADE IN PORTUGAL - EU

GLOBAL FIRE EQUIPMENT S.A.

Sítio dos Barrabés, Armazém Nave Y, Caixa Postal 908-Z, 8150-016 São Brás de Alportel - PORTUGAL | Tel: +351 289 896 560
Email: info@globalfire-equipment.com | Technical Support: techs@globalfire-equipment.com | www.globalfire-equipment.com


TECHNICAL SPECIFICATIONS

SUPPLY VOLTAGE	Loop Powerd - 20V to 30V DC
LOOP CURRENT - QUIESCENT	0.5mA
LOOP CURRENT - ALARM BEACON	3mA Max.
MAX. CABLE SIZE	2.5 mm ²
MAX. HUMIDITY	95% RH Non-Condensing
OPERATING TEMPERATURE	-10°C to 55°C
ENCLOSURE MATERIAL	Red / ABS
PROTECTION CATEGORY	IP44
DIMENSIONS	110 (D) x 49.5 (H) mm
WEIGHT	150g included beacon base - 180g inc. packaging

ORDER CODE	DESCRIPTION
VALKYRIE AB	ADDRESSABLE BEACON
VALKYRIE ABI	ADDRESSABLE BEACON WITH ISOLATOR


SOUNDER BASE - LOOP CONNECTIONS

Please note that this device is polarised.

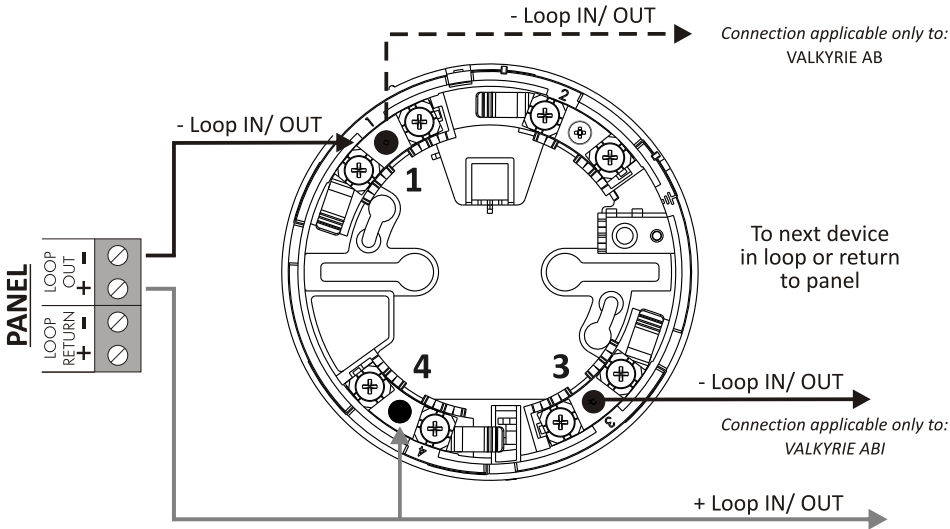


NOTE: Address programmed on switches 1-5 has an OFFSET of 94. For example if D.I.L. switches 1-5 are all set to OFF the actual sounder address, as read by the panel, will be 94.

BASE LOCK




To lock sounder remove pin available at terminal 4 on the underside of the sounder using a small screwdriver.



To unlock sounder from its base push provided unlock key through hole available on the base side wall as shown.

D.I.L. SWITCHES CONFIGURATION



Switches 1-5
Used to configure address in the range 94-125

Switch 6 and 7
Not used

Switch 8
Shadow Beacon

Address Switches

1 ON = 1
2 ON = 2
3 ON = 4
4 ON = 8
5 ON = 16

Sounder Type

Switch No. 8
OFF = Shadow
ON = Normal

SOUNDER/BEACON ADDRESS SETTINGS

Sounder 1 94	Sounder 2 95	Sounder 3 96	Sounder 4 97	Sounder 5 98	Sounder 6 99	Sounder 7 100	Sounder 8 101
Sounder 9 102	Sounder 10 103	Sounder 11 104	Sounder 12 105	Sounder 13 106	Sounder 14 107	Sounder 15 108	Sounder 16 109
Sounder 17 110	Sounder 18 111	Sounder 19 112	Sounder 20 113	Sounder 21 114	Sounder 22 115	Sounder 23 116	Sounder 24 117
Sounder 25 118	Sounder 26 119	Sounder 27 120	Sounder 28 121	Sounder 29 122	Sounder 30 123	Sounder 31 124	Sounder 32 125

NOTE: Address programmed on switches 1-5 has an OFFSET of 94.

For example if D.I.L. switches 1-5 are all set to OFF the actual sounder address, as read by the panel, will be 94.