

MANUAL 290519

MADE IN PORTUGAL - EU

GLOBAL FIRE EQUIPMENT S.A.

Sítio dos Barrabás, Armazém Nave Y, Caixa Postal 908-Z, 8150-016 São Brás de Alportel - PORTUGAL | Tel: +351 289 896 560
Email: info@globalfire-equipment.com | Technical Support: techs@globalfire-equipment.com | www.globalfire-equipment.com

TECHNICAL SPECIFICATIONS


SUPPLY VOLTAGE	20V to 30V DC
LOOP CURRENT - QUIESCENT / ALARM BEACON	0.5 mA / 3 mA Max.
CABLE SIZE	2.5 mm ²
RESET/START-UP TIMES	20 seconds max.
PROTECTION CATEGORY	IP65 - Type B - Outdoor Use
COLOUR / CASE MATERIAL	Red / ABS & PC - Flame Retardant rating 94V0
OPER. TEMPERATURE / MAX. HUMIDITY	-25°C to 70°C / 95% RH Non-Condensing
DIMENSIONS / WEIGHT	112 (D) x 82 (H) mm / 205g - 240g included packaging

ORDER CODE

DESCRIPTION


VALKYRIE ABI IP65	ADDRESSABLE WALL MOUNTED VISUAL INDICATING DEVICE W/ ISOLATOR - IP65 RATED
--------------------------	--

TERMINALS - LOOP CONNECTIONS

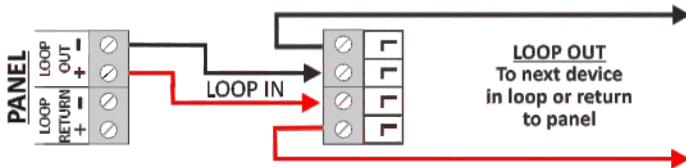

D.I.L. SWITCH CONFIGURATIONS

ON (1)



OFF (0)

Switches 1-5
Used to configure address
in the range 94-125

Switch 6 and 7
Not used

Switch 8
Shadow Beacon

Address Switches

1 ON = 1
2 ON = 2
3 ON = 4
4 ON = 8
5 ON = 16

Sounder Type

Switch No. 8
OFF = Shadow
ON = Normal

BEACON ADDRESS SETTINGS

Sounder 1 94	Sounder 2 95	Sounder 3 96	Sounder 4 97	Sounder 5 98	Sounder 6 99	Sounder 7 100	Sounder 8 101
Sounder 9 102	Sounder 10 103	Sounder 11 104	Sounder 12 105	Sounder 13 106	Sounder 14 107	Sounder 15 108	Sounder 16 109
Sounder 17 110	Sounder 18 111	Sounder 19 112	Sounder 20 113	Sounder 21 114	Sounder 22 115	Sounder 23 116	Sounder 24 117
Sounder 25 118	Sounder 26 119	Sounder 27 120	Sounder 28 121	Sounder 29 122	Sounder 30 123	Sounder 31 124	Sounder 32 125

NOTE: Address programmed on switches 1-5 has an OFFSET of 94.

For example if D.I.L. switches 1-5 are all set to OFF the actual beacon address, as read by the panel, will be 94.