

PRODUCING TRUST IN FIRE AND SAFETY



# FIRE RATED METAL DOORS



[www.sffecoglobal.com](http://www.sffecoglobal.com)



SFFECO with its more than 30 years of experience has always been a progressive organization that has remained in the forefront of the fire fighting industry with innovative, re-engineered and unique products.

- SFFECO in its state-of-the-art manufacturing plants in RIYADH & DUBAI works in close connections with renowned governmental and certification bodies to provide key answer to the challenges faced by the society.

SFFECO brings together over 3-Decades of expertise and experience in form of Design, Consultancy, Testing, Commissioning, Maintenance & Refurbishment of fire protecting and fire fighting. system.




SFFECO is proud to be working with International certification bodies. For specific product certifications, please check the respective product page or contact our sales team.



LPCB



# SINGLE LEAF DOOR

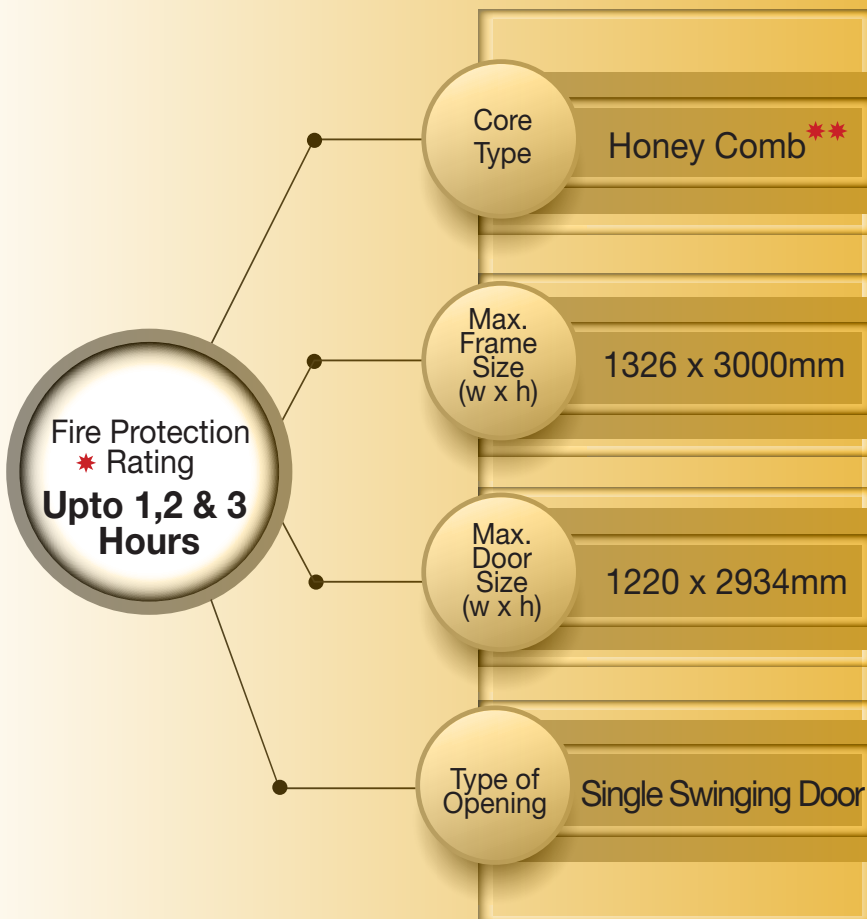

## FEATURES

- Doors can be used in dry wall and masonry construction.
- SFFECO UL Listed doors are available in Cold Rolled Steel, Galvanized steel, Hot Dipped Electro galvanized or Galvalume material.
- Door leaf thickness: 45 mm
- Material thickness (Gauges): 1.2mm (18 gauge)
- Painting: Prime painted materials can be used for hot rolled or cold rolled steel sheet.
- High aesthetics and robust structure
- Easy to install on a Masonry wall opening & dry walls. Factory finished for primer and paint finishes.
- Conforming to highest quality standards
- Temperature Rise Door ratings available upon request
- Air Leakage Doors available upon request

TESTED ACCORDING TO  
UL10B | UL10C


&

CONFORMING TO  
NFPA 80 | NFPA 252 |  
CAN-ULC S104

★ FIRE PROTECTION RATINGS ARE SUBJECT TO THE NATURE OF ORDER.

★★ CERAMIC FIBER / FIBERGLASS INSULATIONS ARE AVAILABLE UPON REQUEST.

# DOUBLE LEAF DOOR

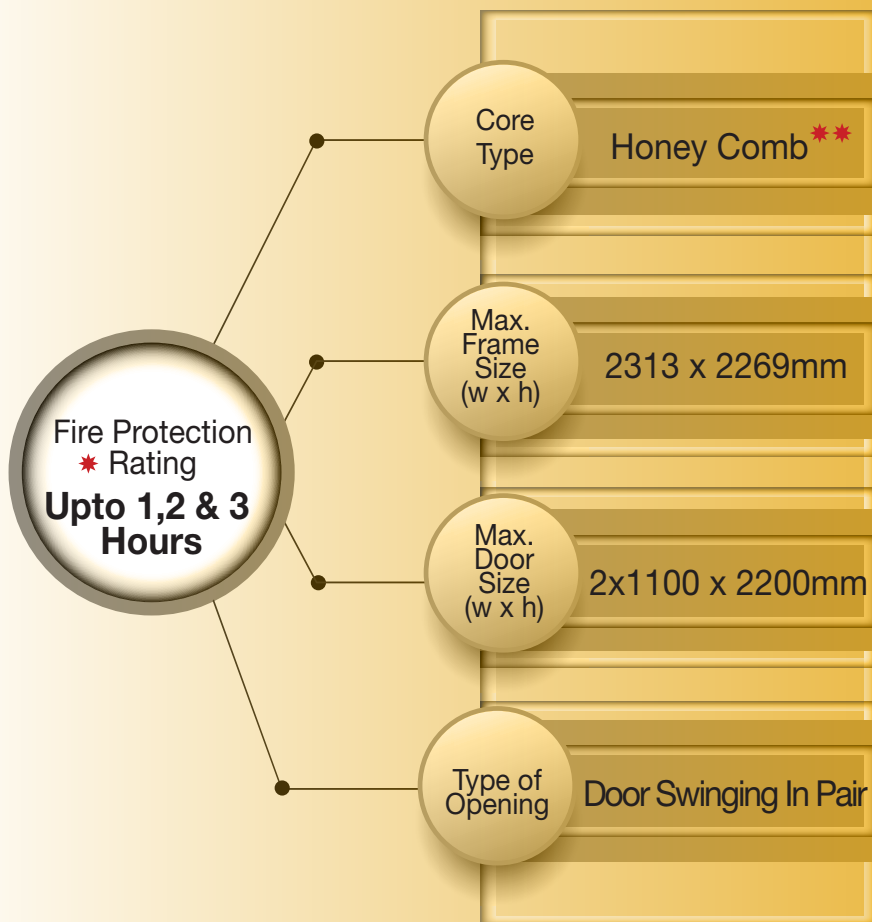

## FEATURES

- Doors can be used in dry wall and masonry construction.
- SFFECO UL Listed doors are available in Cold Rolled Steel, Galvanized steel, Hot Dipped Electro galvanized or Galvalume material.
- Door leaf thickness: 45 mm
- Material thickness (Gauges): 1.2mm (18 gauge)
- Painting: Prime painted materials can be used for hot rolled or cold rolled steel sheet.
- High aesthetics and robust structure
- Easy to install on a Masonry wall opening & dry walls. Factory finished for primer and paint finishes.
- Conforming to highest quality standards
- Temperature Rise Door ratings available upon request
- Air Leakage Doors available upon request

TESTED ACCORDING TO  
UL10B | UL10C

&

CONFORMING TO  
NFPA 80 | NFPA 252 |  
CAN-ULC S104


\* FIRE PROTECTION RATINGS ARE SUBJECT TO THE NATURE OF ORDER.

\*\* CERAMIC FIBER / FIBERGLASS INSULATIONS ARE AVAILABLE UPON REQUEST.



# DOUBLE LEAF DOOR

## SPECIAL APPLICATION

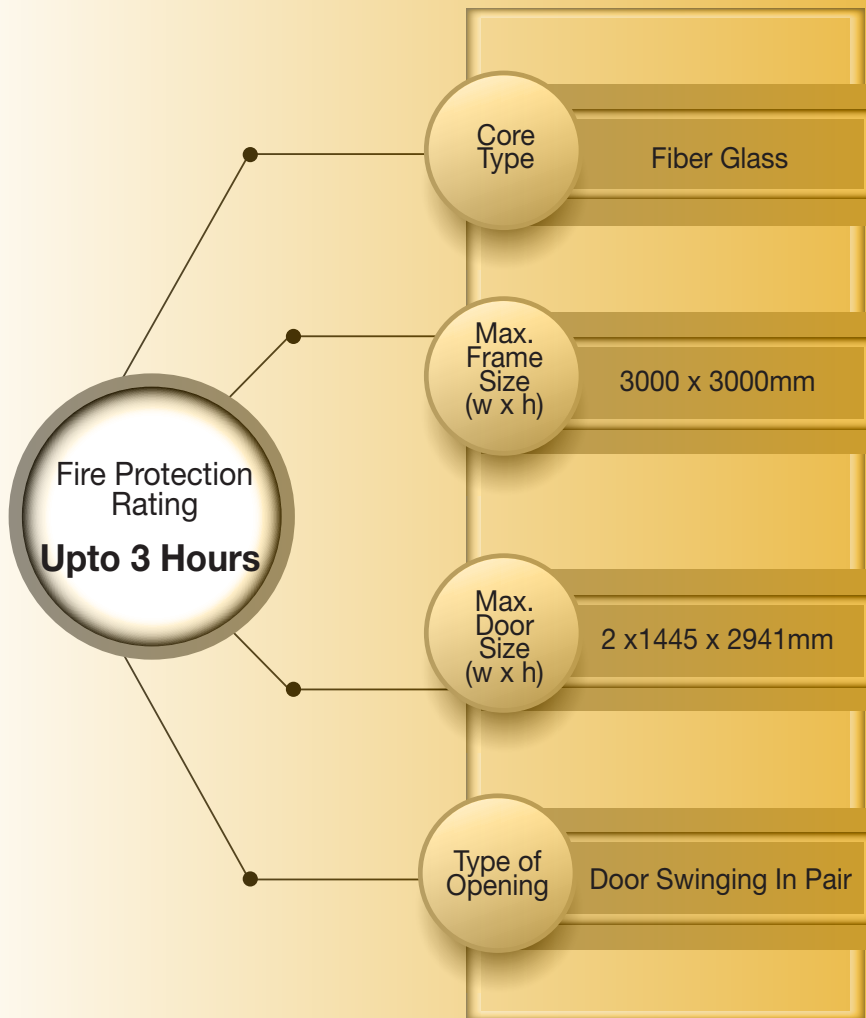

## FEATURES

- Doors can be used in dry wall and masonry construction.
- SFFECO UL Listed doors are available in Cold Rolled Steel, Galvanized steel, Hot Dipped Electro galvanized or Galvalume material.
- Door leaf thickness: 45 mm
- Material thickness (Gauges): 1.2mm (18 gauge)
- Painting: Prime painted materials can be used for hot rolled or cold rolled steel sheet.
- High aesthetics and robust structure
- Easy to install on a Masonry wall opening & dry walls. Factory finished for primer and paint finishes.
- Conforming to highest quality standards

**TESTED ACCORDING TO**  
**UL10B | UL10C**

**&**

**CONFORMING TO**  
**NFPA 80 | NFPA 252 |**  
**CAN-ULC S104**

★ DOORS ARE AVAILABLE IN MULTIPLE APPLICATIONS

# SINGLE LEAF DOOR

## SPECS & FEATURES



## ORDERING FORM

CLIENT NAME \_\_\_\_\_

CONTACT DETAILS \_\_\_\_\_

**HOURLY RATING :** ☐ 2hr

### **DIMENSIONS:**

Frame Depth, D = \_\_\_\_\_

Frame Overall Width, W = \_\_\_\_\_

Frame Overall Height, H = \_\_\_\_\_

**COLOR REQUIRED:** ☐ Red ☐ Beige ☐ Gray

☐ Others: \_\_\_\_\_


**QUANTITY:** \_\_\_\_\_

### **STANDARD FEATURES:**


1. Door Leaf thickness = 45mm
2. CRS / Galvanized sheet
  - a) Sheet thickness of door = 1.2mm
  - b) Sheet thickness of frame (Fire rated) = 1.5 mm
  - c) Sheet thickness of frame (Fire rated) = 2.0 mm
  - d) Powder coated paint

### **HARDWARE**

- ☐ Single Point Lock and latches – Mortise Type
- ☐ Two and three Point Lock and latches – Mortise Type (Surface mounted)
- ☐ Electrically controlled single point lock and latches
- ☐ Auxiliary electromagnetic lock
- ☐ Fire Exit Rim Type
- ☐ Fire Exit Mortise Type
- ☐ Panic hardware
- ☐ Hinges
- ☐ Louvers
- ☐ Vision lite
- ☐ Swinging fire door closer (surface mounted products or spring hinges)
- ☐ Combination fire door closer and holders(Surface mounted)
- ☐ Door viewer
- ☐ **Hourly Rating 3hr\***  
Optional with ceramic fiber insulation

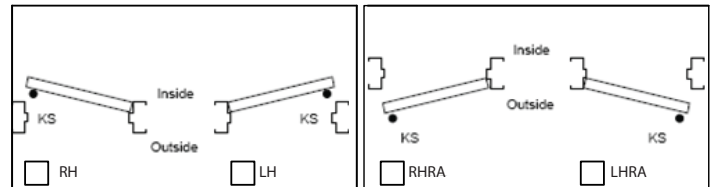


### **FRAME PROFILE**



DOUBLE RABBET


\* Single Rabbet also available upon request clients request

### **DOOR DESIGNS:**

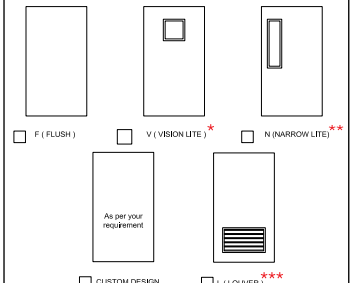


\* Vision Lite Panel : 254 x 254 mm  
\*\* Narrow Lite Panel : 150 x 400 mm

\*\*\* Louver Panel : 610 x 305 mm  
\*\*\* Louver Panel : 610 x 610 mm

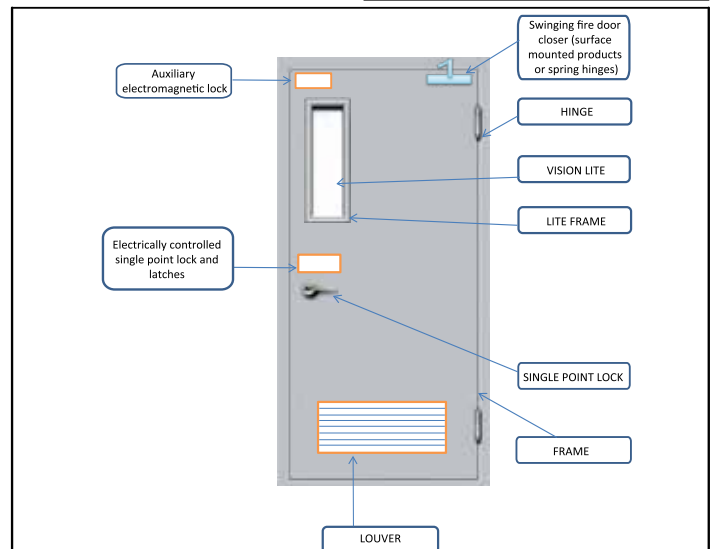

**Note:**  
Vision lite & louver cannot be coupled in single leaf door above the photo is for highlight the accessories.

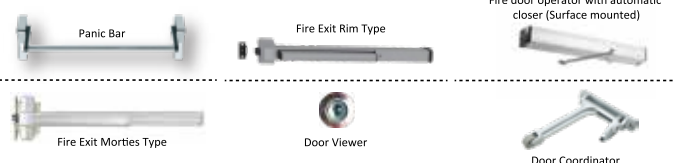

# DOUBLE LEAF DOOR

## SPECS & FEATURES



## ORDERING FORM

CLIENT NAME \_\_\_\_\_

CONTACT DETAILS \_\_\_\_\_

**HOURLY RATING :** ☐ 2hr

### **DIMENSIONS:**

Frame Depth, D = \_\_\_\_\_

Frame Overall Width, W = \_\_\_\_\_

Frame Overall Height, H = \_\_\_\_\_

**COLOR REQUIRED:** ☐ Red ☐ Beige ☐ Gray

☐ Others: \_\_\_\_\_


**QUANTITY:** \_\_\_\_\_

### **STANDARD FEATURES:**


1. Door Leaf thickness = 45mm
2. CRS / Galvanized sheet / Hot Dipped Electro galvanized or Galvalume
  - a) Sheet thickness of door = 1.2mm
  - b) Sheet thickness of frame (Fire rated) = 1.5 mm
  - c) Sheet thickness of frame (Fire rated) = 2.0 mm
  - d) Powder coated paint

### **HARDWARE**

- ☐ Single Point Lock and latches – Mortise Type
- ☐ Two and three Point Lock and latches – Mortise Type (Surface mounted) ( two-point latches for the inactive door)
- ☐ Electrically controlled single point lock and latches
- ☐ Auxiliary electromagnetic lock
- ☐ Fire Exit Rim Type
- ☐ Fire Exit Mortise Type
- ☐ Surface vertical rod type fire exit hardware
- ☐ Manual or Automatic or Self Latching Surface and Flush bolts For inactive door leaf in pair conditions only.
- ☐ Panic hardware
- ☐ Hinges
- ☐ Louvers
- ☐ Vision lite
- ☐ Swinging fire door closer (surface mounted products or spring hinges)
- ☐ Combination fire door closer and holders (Surface mounted)
- ☐ Door co-ordinator
- ☐ Door viewer


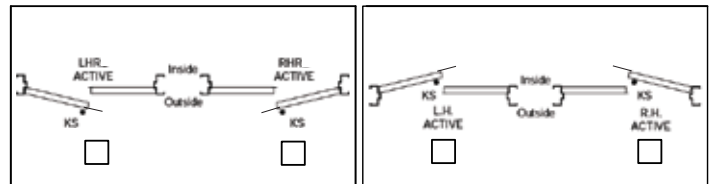


### **FRAME PROFILE**





\* Single Rabbit also available upon request clients request

### **DOOR DESIGNS:**

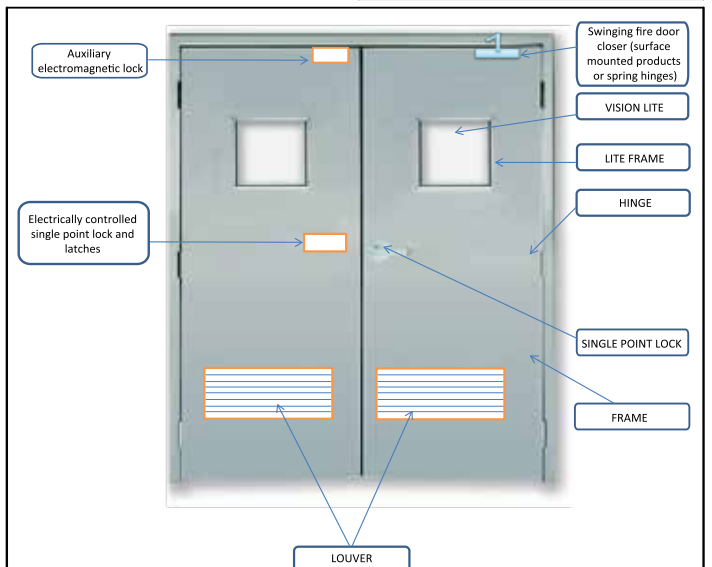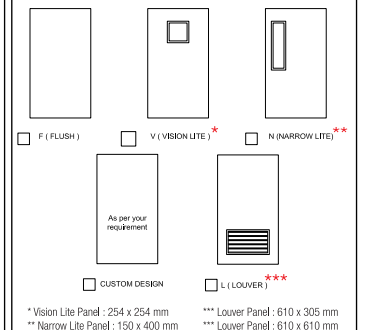

**Note:**  
Vision lite & louver cannot be coupled in single leaf door above the photo is for highlight the accessories.

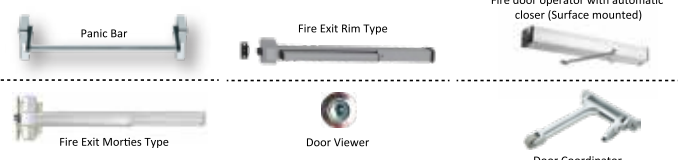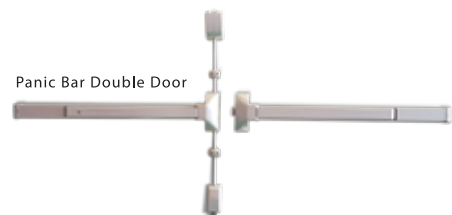

Follow us on Social Media



P.O.Box 261318  
Jebel Ali Freezone  
Dubai, U.A.E

T: +971 4 880 9890  
F: +971 4 880 9822  
E: [sales@sffecoglobal.com](mailto:sales@sffecoglobal.com)  
W: [www.sffecoglobal.com](http://www.sffecoglobal.com)



**800** SFFECO  
733326